


PERFORMANCE CHART AT N=2850RPM

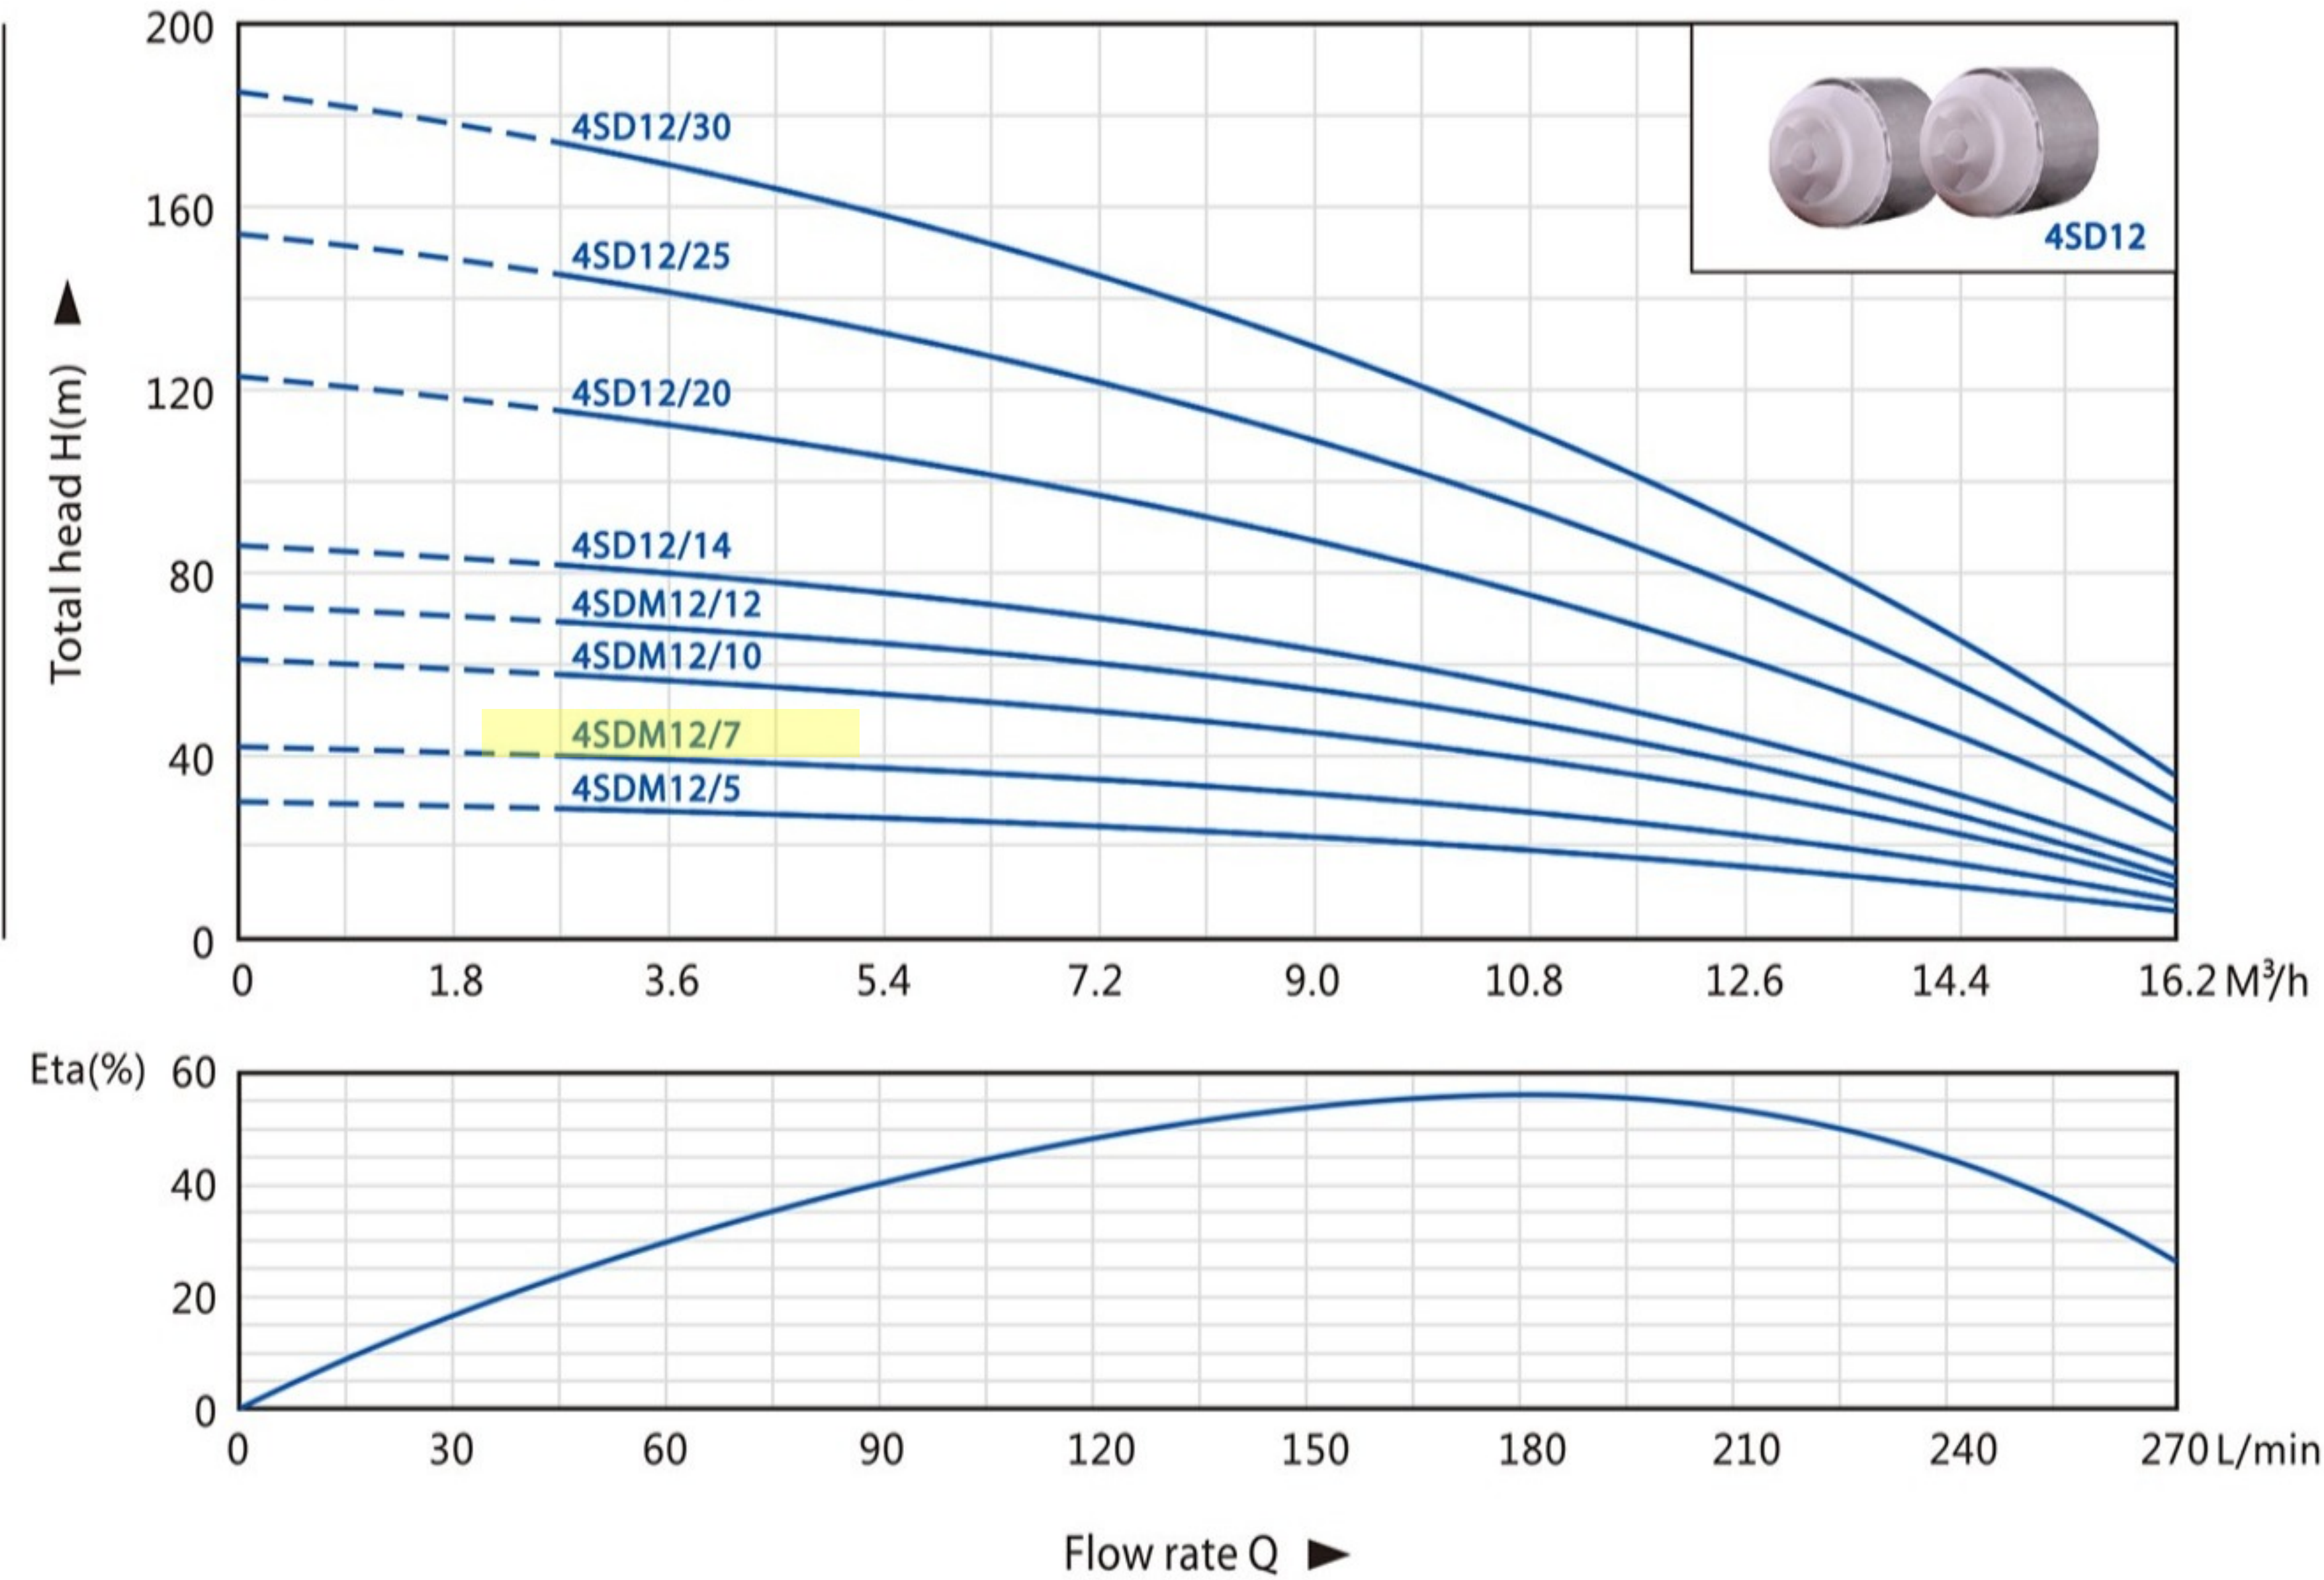

PERFORMANCE DATA 50Hz

Model		Power		Capacity & Head n=2850 r.p.m										
1~ 220V-240V	3~ 380V-415V	kW	HP	Q(M³/h)	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4	16.2
				Q(L/min)	0	30	60	90	120	150	180	210	240	270
4SDM12/5	4SD12/5	1.1	1.5		30	29	28	26	24	22	20	14	12	6
4SDM12/7	4SD12/7	1.5	2		42	41	40	36	34	32	28	20	16	8
4SDM12/10	4SD12/10	2.2	3	H(m)	61	59	57	52	49	45	40	29	24	12
4SDM12/12	4SD12/12	2.6	3.5		73	71	68	62	58	54	48	35	15	13
	4SD12/14	3.0	4		86	83	80	73	68	63	55	46	34	17
	4SD12/20	4.0	5.5		123	119	114	104	97	90	80	58	48	24
	4SD12/25	5.5	7.5		154	148	143	130	121	112	100	72	60	30
	4SD12/30	7.5	10		185	177	171	156	148	135	120	87	72	36

DIMENSIONS & WEIGHTS

Model		DN	DIMESION (mm)			WEIGHT (kg)		
1~ 220V-240V	3~ 380V-415V		P	M	T	P	M	T
4SDM12/5	4SD12/5	1¼"/1½"/2"	546	438	934	3.7	10.8	14.5
4SDM12/7	4SD12/7	1¼"/1½"/2"	682	515	1147	4.4	13.8	18.2
4SDM12/10	4SD12/10	1¼"/1½"/2"	886	590	1427	5.5	17.4	22.9
4SDM12/12	4SD12/12	1¼"/1½"/2"	1022	625	1597	6.3	20.3	26.6
	4SD12/14	1¼"/1½"/2"	1158	605	1714	7.2	19.3	26.5
	4SD12/20	1¼"/1½"/2"	1568	723	2241	9.6	21.9	31.5
	4SD12/25	1¼"/1½"/2"	1909	813	2672	11.4	25.6	37
	4SD12/30	1¼"/1½"/2"	2250	903	3103	13.6	28.3	41.9

