


PERFORMANCE CHART AT N=2850RPM

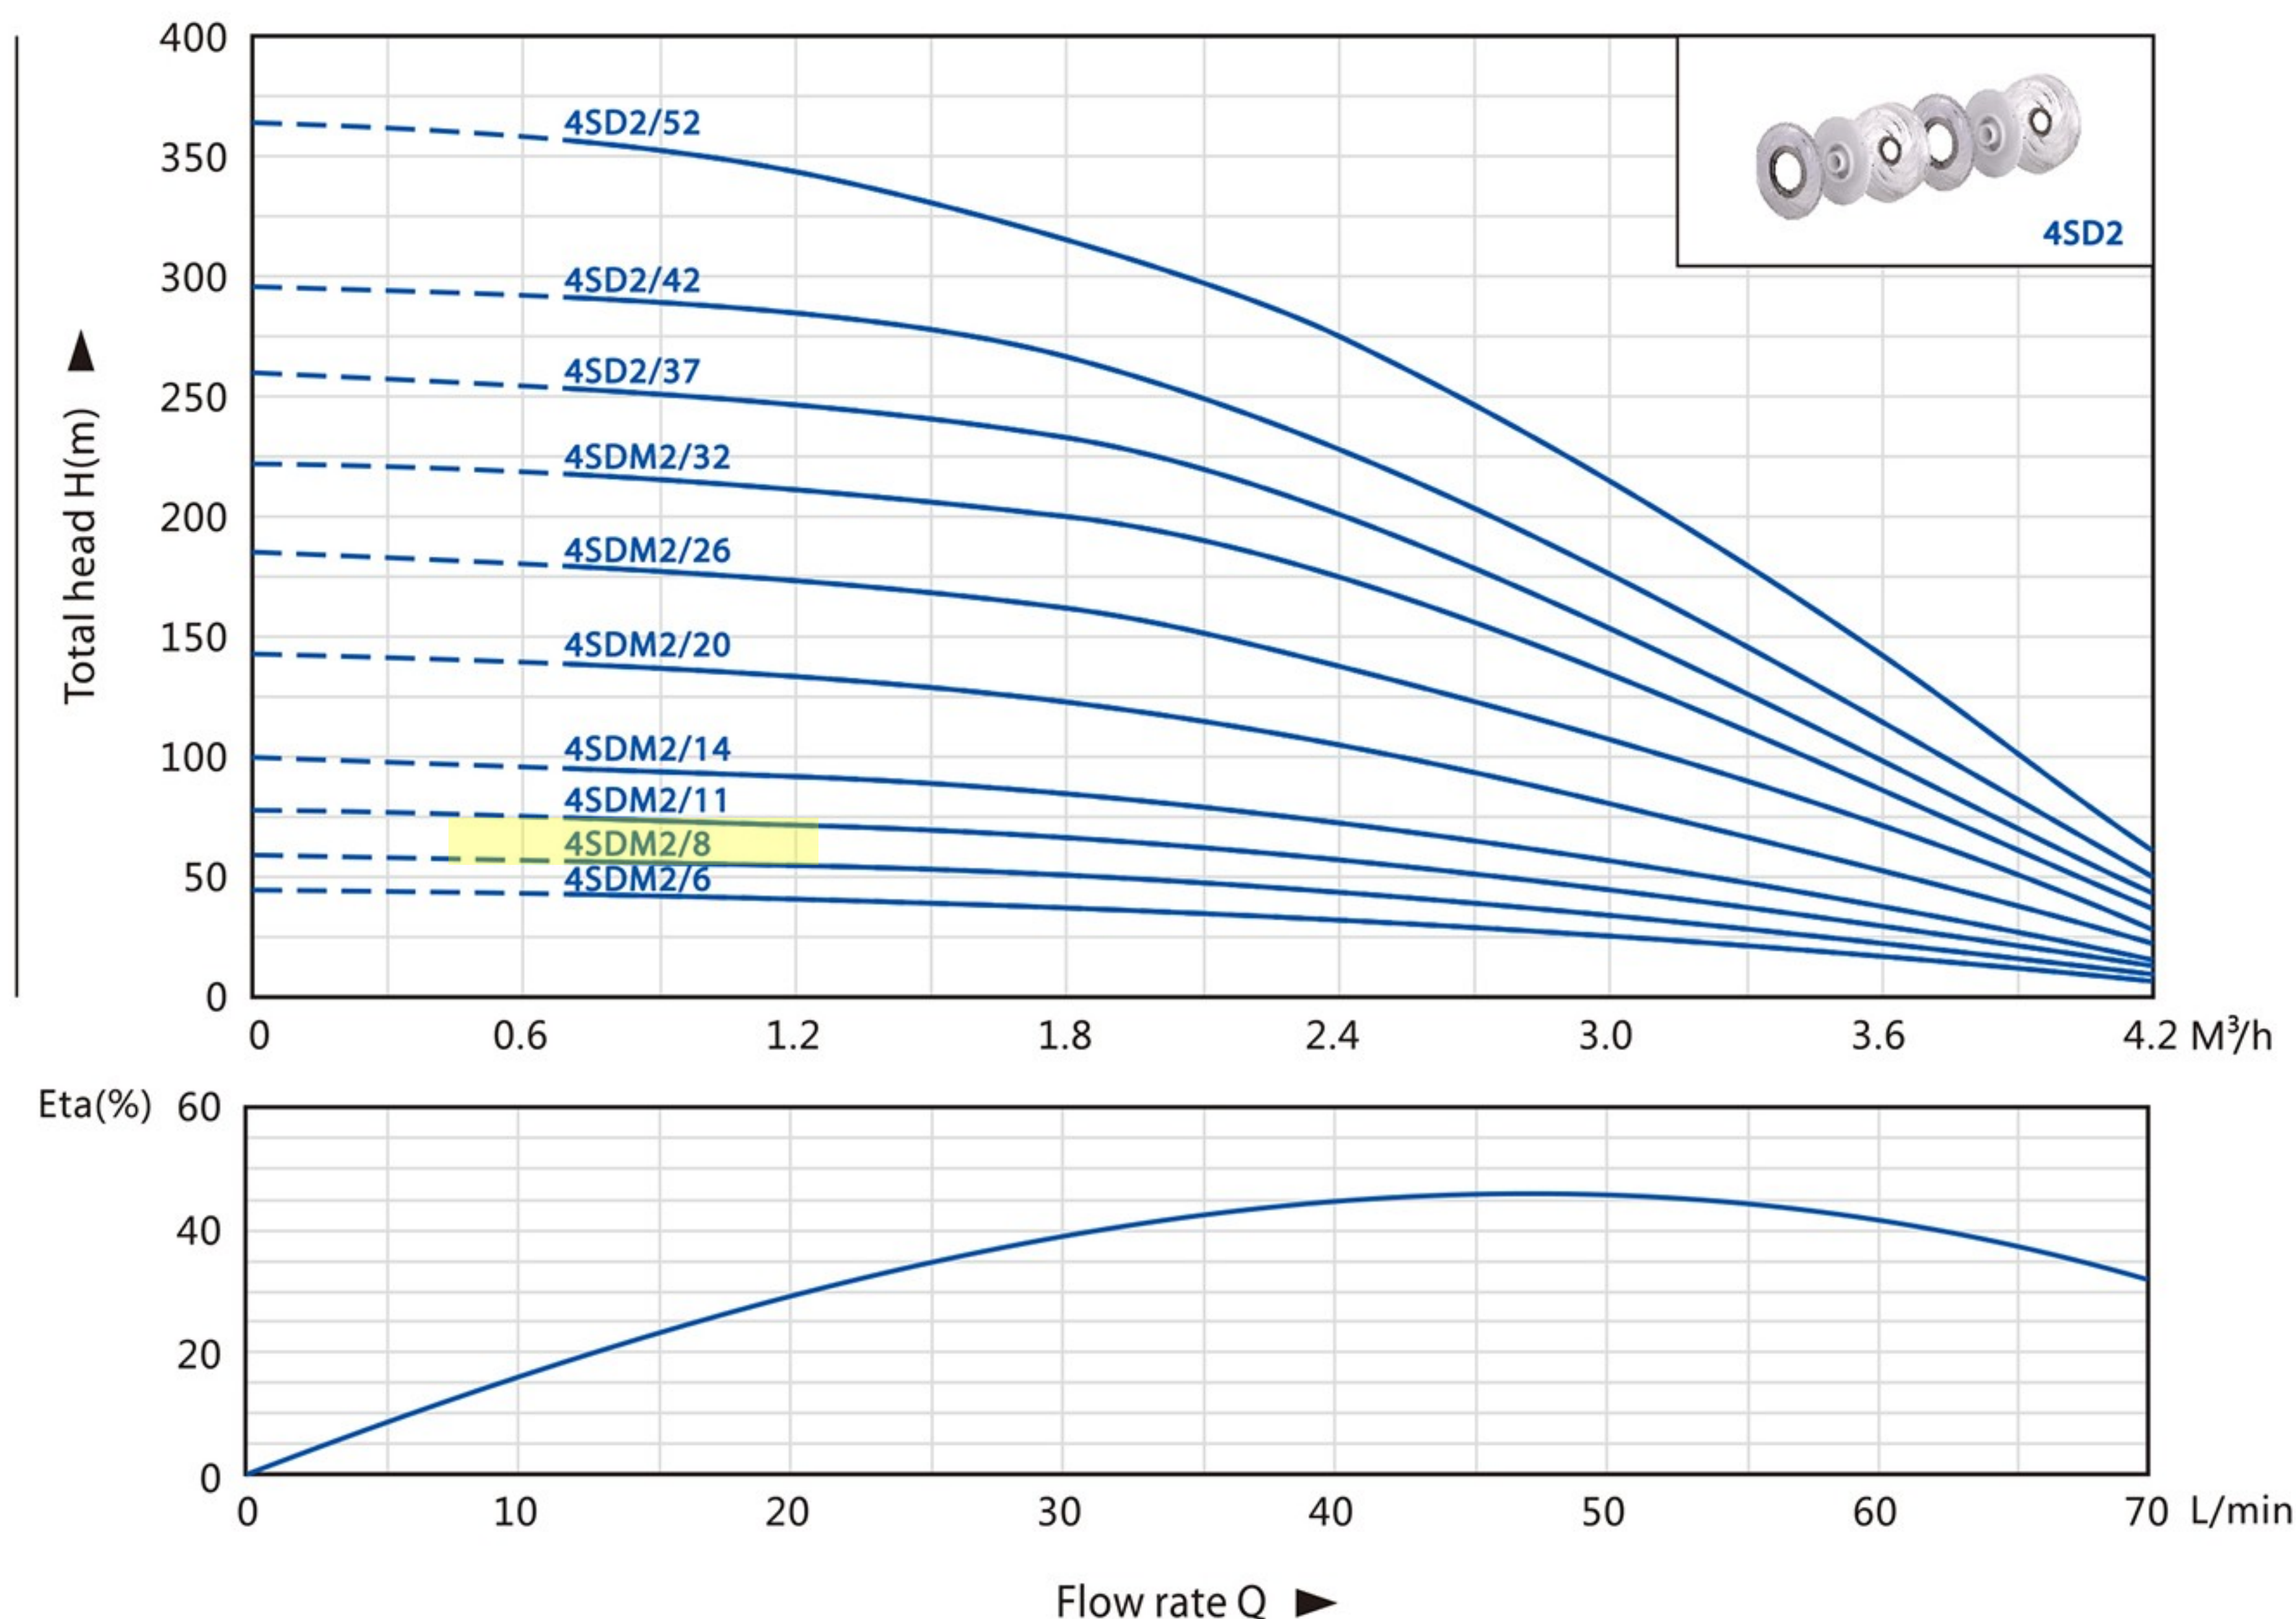

PERFORMANCE DATA 50Hz

Model		Power		Capacity & Head								
1~ 220V-240V	3~ 380V-415V	kW	HP	n=2850 r.p.m								
				Q(M³/h)	0	0.6	1.2	1.8	2.4	3	3.6	4.2
4SDM2/6		0.25	0.33	Q(L/min)	0	10	20	30	40	50	60	70
4SDM2/8		0.37	0.5		45	42	41	39	33	25	18	7
4SDM2/11		0.55	0.75		60	57	55	52	43	33	23	10
4SDM2/14	4SD2/14	0.75	1		78	75	72	69	58	45	30	13
4SDM2/20	4SD2/20	1.1	1.5		100	96	92	88	74	57	39	16
4SDM2/26	4SD2/26	1.5	2		142	138	133	126	106	82	54	23
4SDM2/32	4SD2/32	2.2	3		185	180	173	163	138	105	70	28
4SDM2/37	4SD2/37	2.6	3.5		225	220	214	200	169	130	89	38
	4SD2/42	3	4		260	254	247	233	196	151	103	44
	4SD2/52	4	5.5		295	288	280	264	222	172	117	50
					365	356	347	327	275	213	145	62

DIMENSIONS & WEIGHTS

Model		DN	DIMENSION (mm)			WEIGHT (kg)		
1~ 220V-240V	3~ 380V-415V		P	M	T	P	M	T
4SDM2/6		1¼" / 1½"	370	348	668	3.3	6.6	9.9
4SDM2/8		1¼" / 1½"	424	363	737	3.8	7.2	11
4SDM2/11		1¼" / 1½"	505	378	833	4.6	8.0	12.6
4SDM2/14	4SD2/14	1¼" / 1½"	586	398	934	5.2	9.3	14.5
4SDM2/20	4SD2/20	1¼" / 1½"	779	438	1167	6.3	10.8	17.1
4SDM2/26	4SD2/26	1¼" / 1½"	941	515	1406	7.8	13.8	21.6
4SDM2/32	4SD2/32	1¼" / 1½"	1135	590	1675	9.4	17.4	26.8
4SDM2/37	4SD2/37	1¼" / 1½"	1270	723	1943	10.7	20.3	31
	4SD2/42	1¼" / 1½"	1402	723	2075	13.4	19.3	32.7
	4SD2/52	1¼" / 1½"	1704	813	2467	15.6	21.9	37.5

