


PERFORMANCE CHART AT N=2850RPM

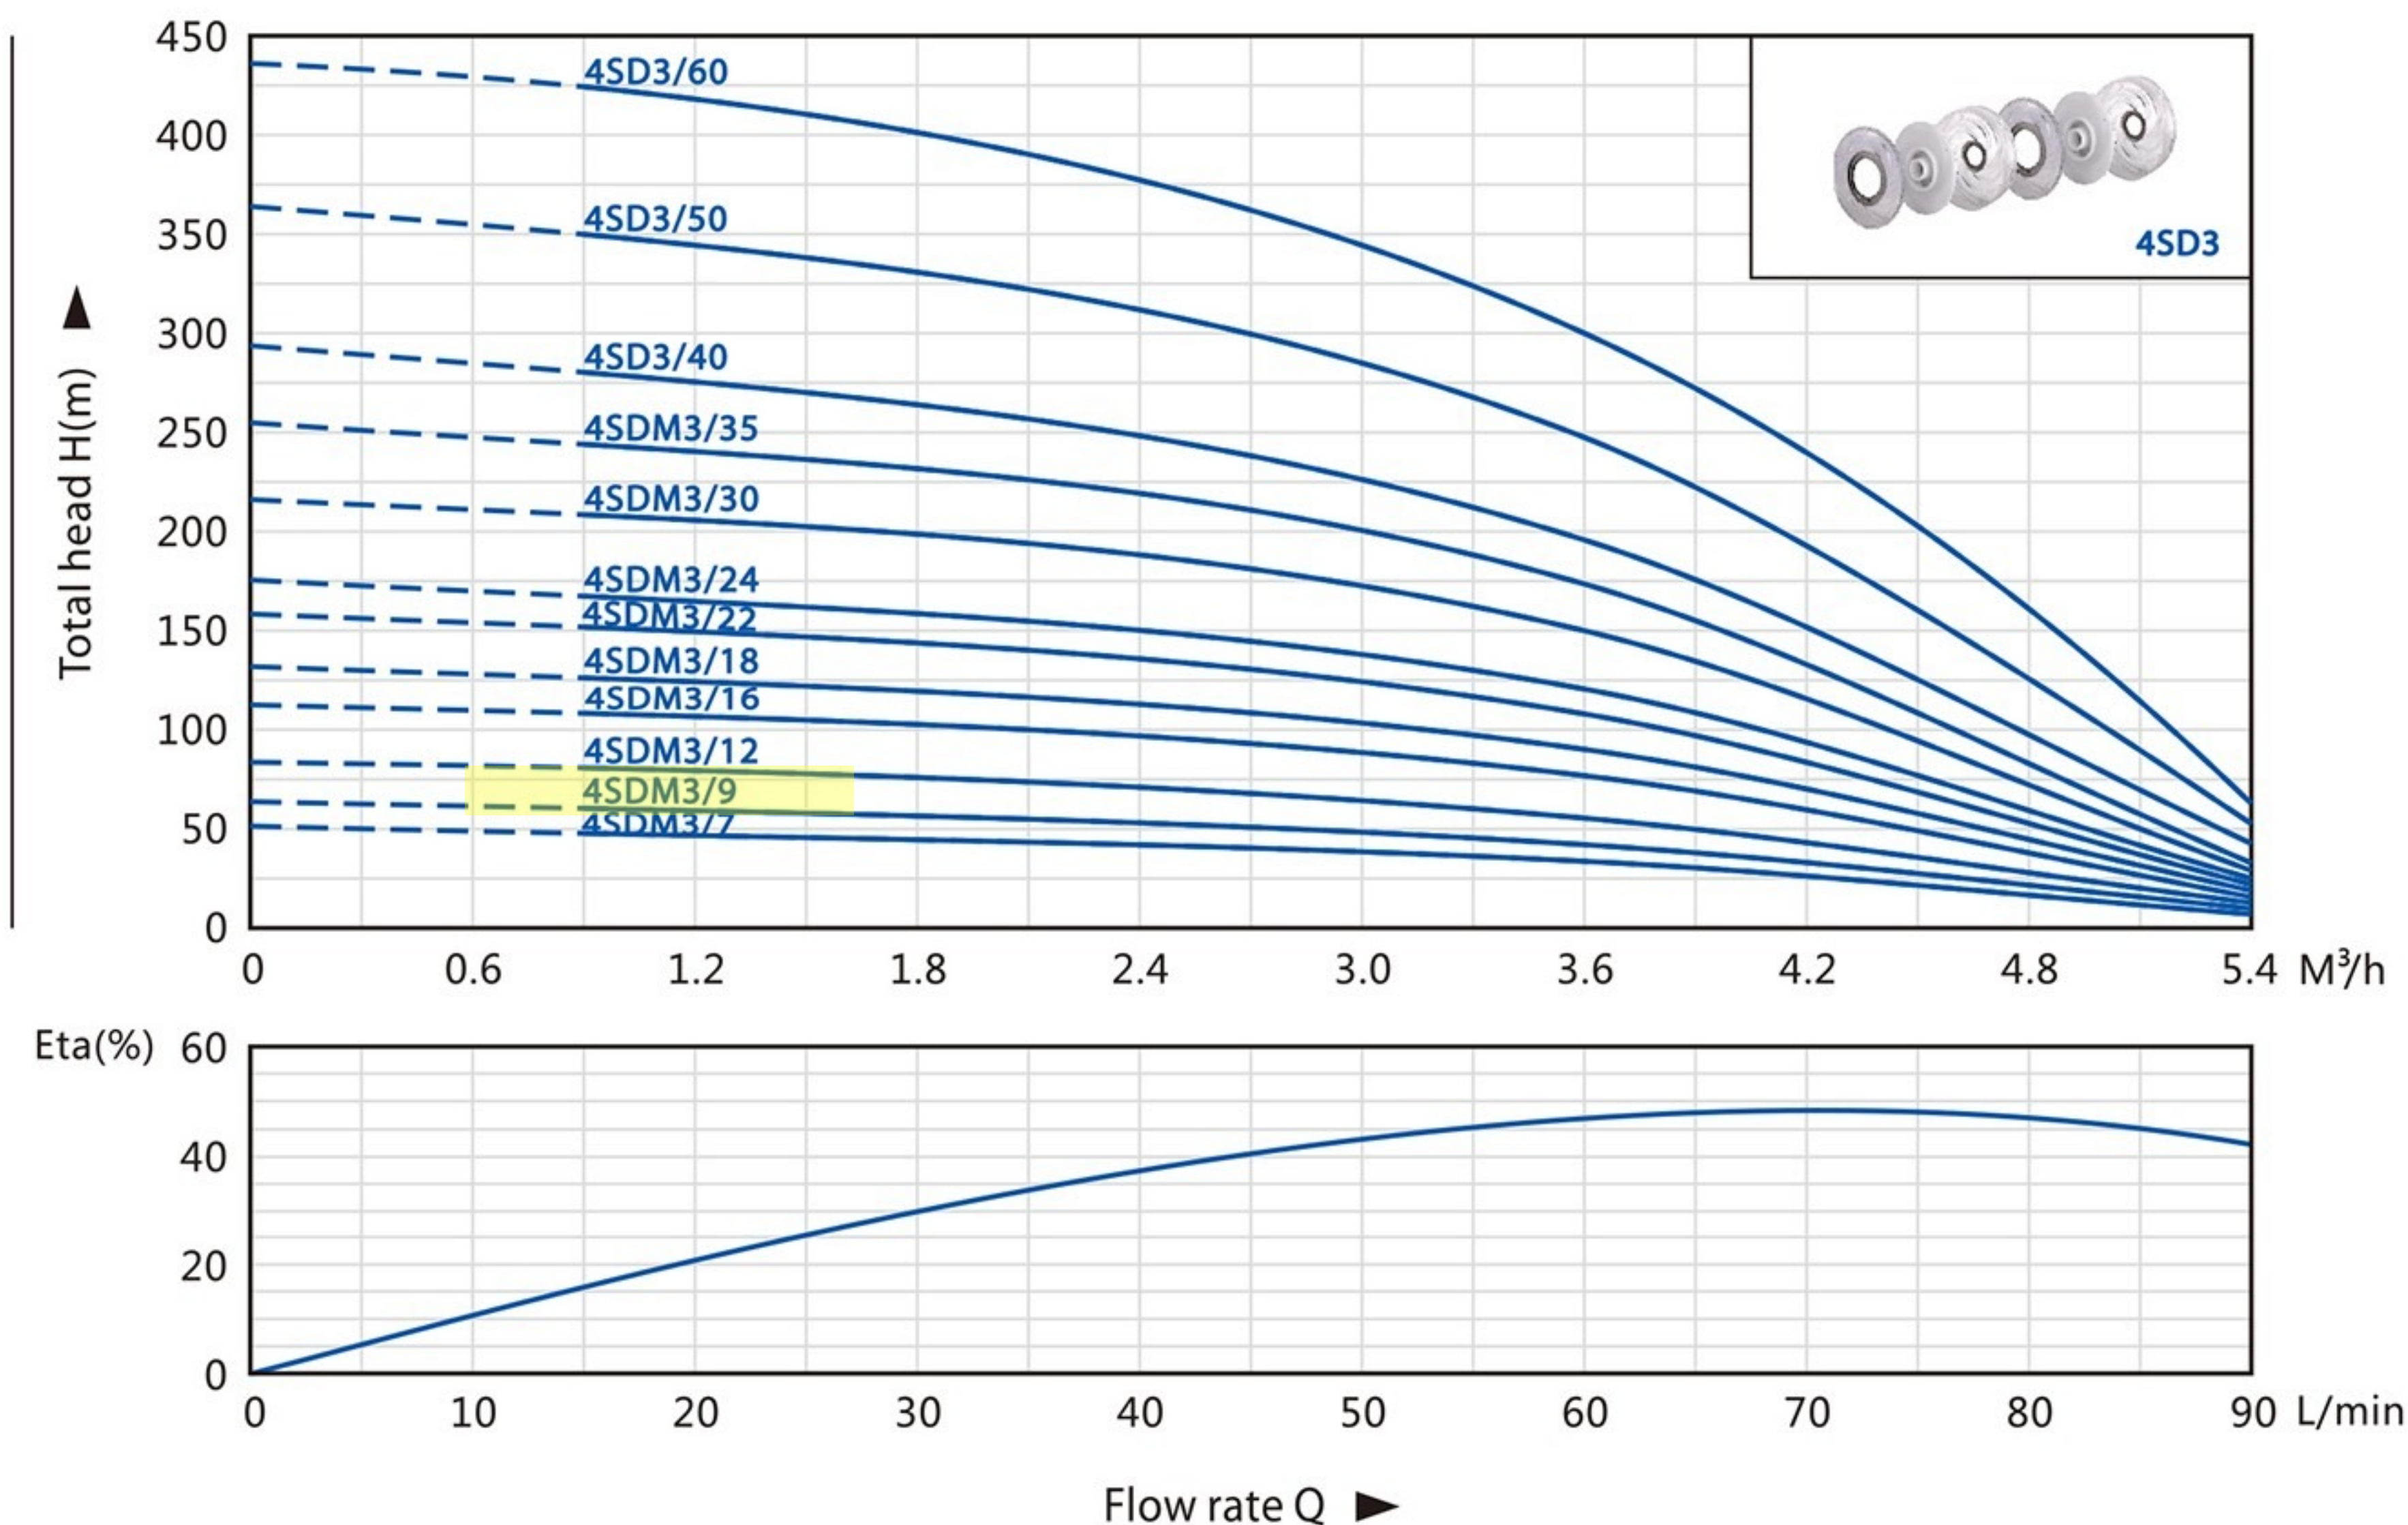

PERFORMANCE DATA 50Hz

Model		Power		Capacity & Head										
1~ 220V-240V	3~ 380V-415V	kW	HP	Q(M³/h)	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4
				Q(L/min)	0	10	20	30	40	50	60	70	80	90
4SDM3/7		0.37	0.5		51	50	49	46	44	38	35	28	15	7
4SDM3/9	4SD3/9	0.55	0.75		65	64	63	60	57	48	45	36	20	9
4SDM3/12	4SD3/12	0.75	1		87	86	85	80	76	65	60	48	26	12
4SDM3/16	4SD3/16	1.1	1.5		116	115	114	106	101	87	80	64	35	17
4SDM3/18	4SD3/18	1.1	1.5		132	131	130	120	113	97	90	72	40	19
4SDM3/22	4SD3/22	1.5	2		160	159	158	146	139	119	110	88	49	23
4SDM3/24	4SD3/24	1.5	2		175	174	173	160	151	130	120	96	53	25
4SDM3/30	4SD3/30	2.2	2.5		218	217	216	200	190	163	150	120	66	31
4SDM3/35	4SD3/35	2.6	3.5		255	254	252	233	221	190	175	140	77	36
	4SD3/40	3.0	4		291	290	288	266	253	217	200	160	89	42
	4SD3/50	4.0	5.5		364	362	360	333	316	272	250	200	111	52
	4SD3/60	5.5	7.5		436	434	432	400	379	326	300	240	133	63

DIMENSIONS & WEIGHTS

Model		DN	DIMENSION (mm)			WEIGHT (kg)		
1~ 220V-240V	3~ 380V-415V		P	M	T	P	M	T
4SDM3/7		1¼" / 1½" / 2"	390	363	703	3.5	7.2	10.7
4SDM3/9	4SD3/9	1¼" / 1½" / 2"	441	378	769	4.1	8	12.1
4SDM3/12	4SD3/12	1¼" / 1½" / 2"	520	398	868	4.9	8.7	13.6
4SDM3/16	4SD3/16	1¼" / 1½" / 2"	656	428	1034	5.9	10.8	16.7
4SDM3/18	4SD3/18	1¼" / 1½" / 2"	709	438	1097	6.4	10.8	17.2
4SDM3/22	4SD3/22	1¼" / 1½" / 2"	813	505	1268	7.4	13.4	20.8
4SDM3/24	4SD3/24	1¼" / 1½" / 2"	866	515	1331	7.9	13.8	21.7
4SDM3/30	4SD3/30	1¼" / 1½" / 2"	1055	590	1595	9.3	17.4	26.7
4SDM3/35	4SD3/35	1¼" / 1½" / 2"	1186	625	1761	10.6	20.3	30.9
	4SD3/40	1¼" / 1½" / 2"	1348	605	1903	11.9	19.3	31.2
	4SD3/50	1¼" / 1½" / 2"	1609	723	2282	14.5	21.9	36.4
	4SD3/60	1¼" / 1½" / 2"	1903	813	2666	17.1	25.6	42.7

