


PERFORMANCE CHART AT N=2850RPM

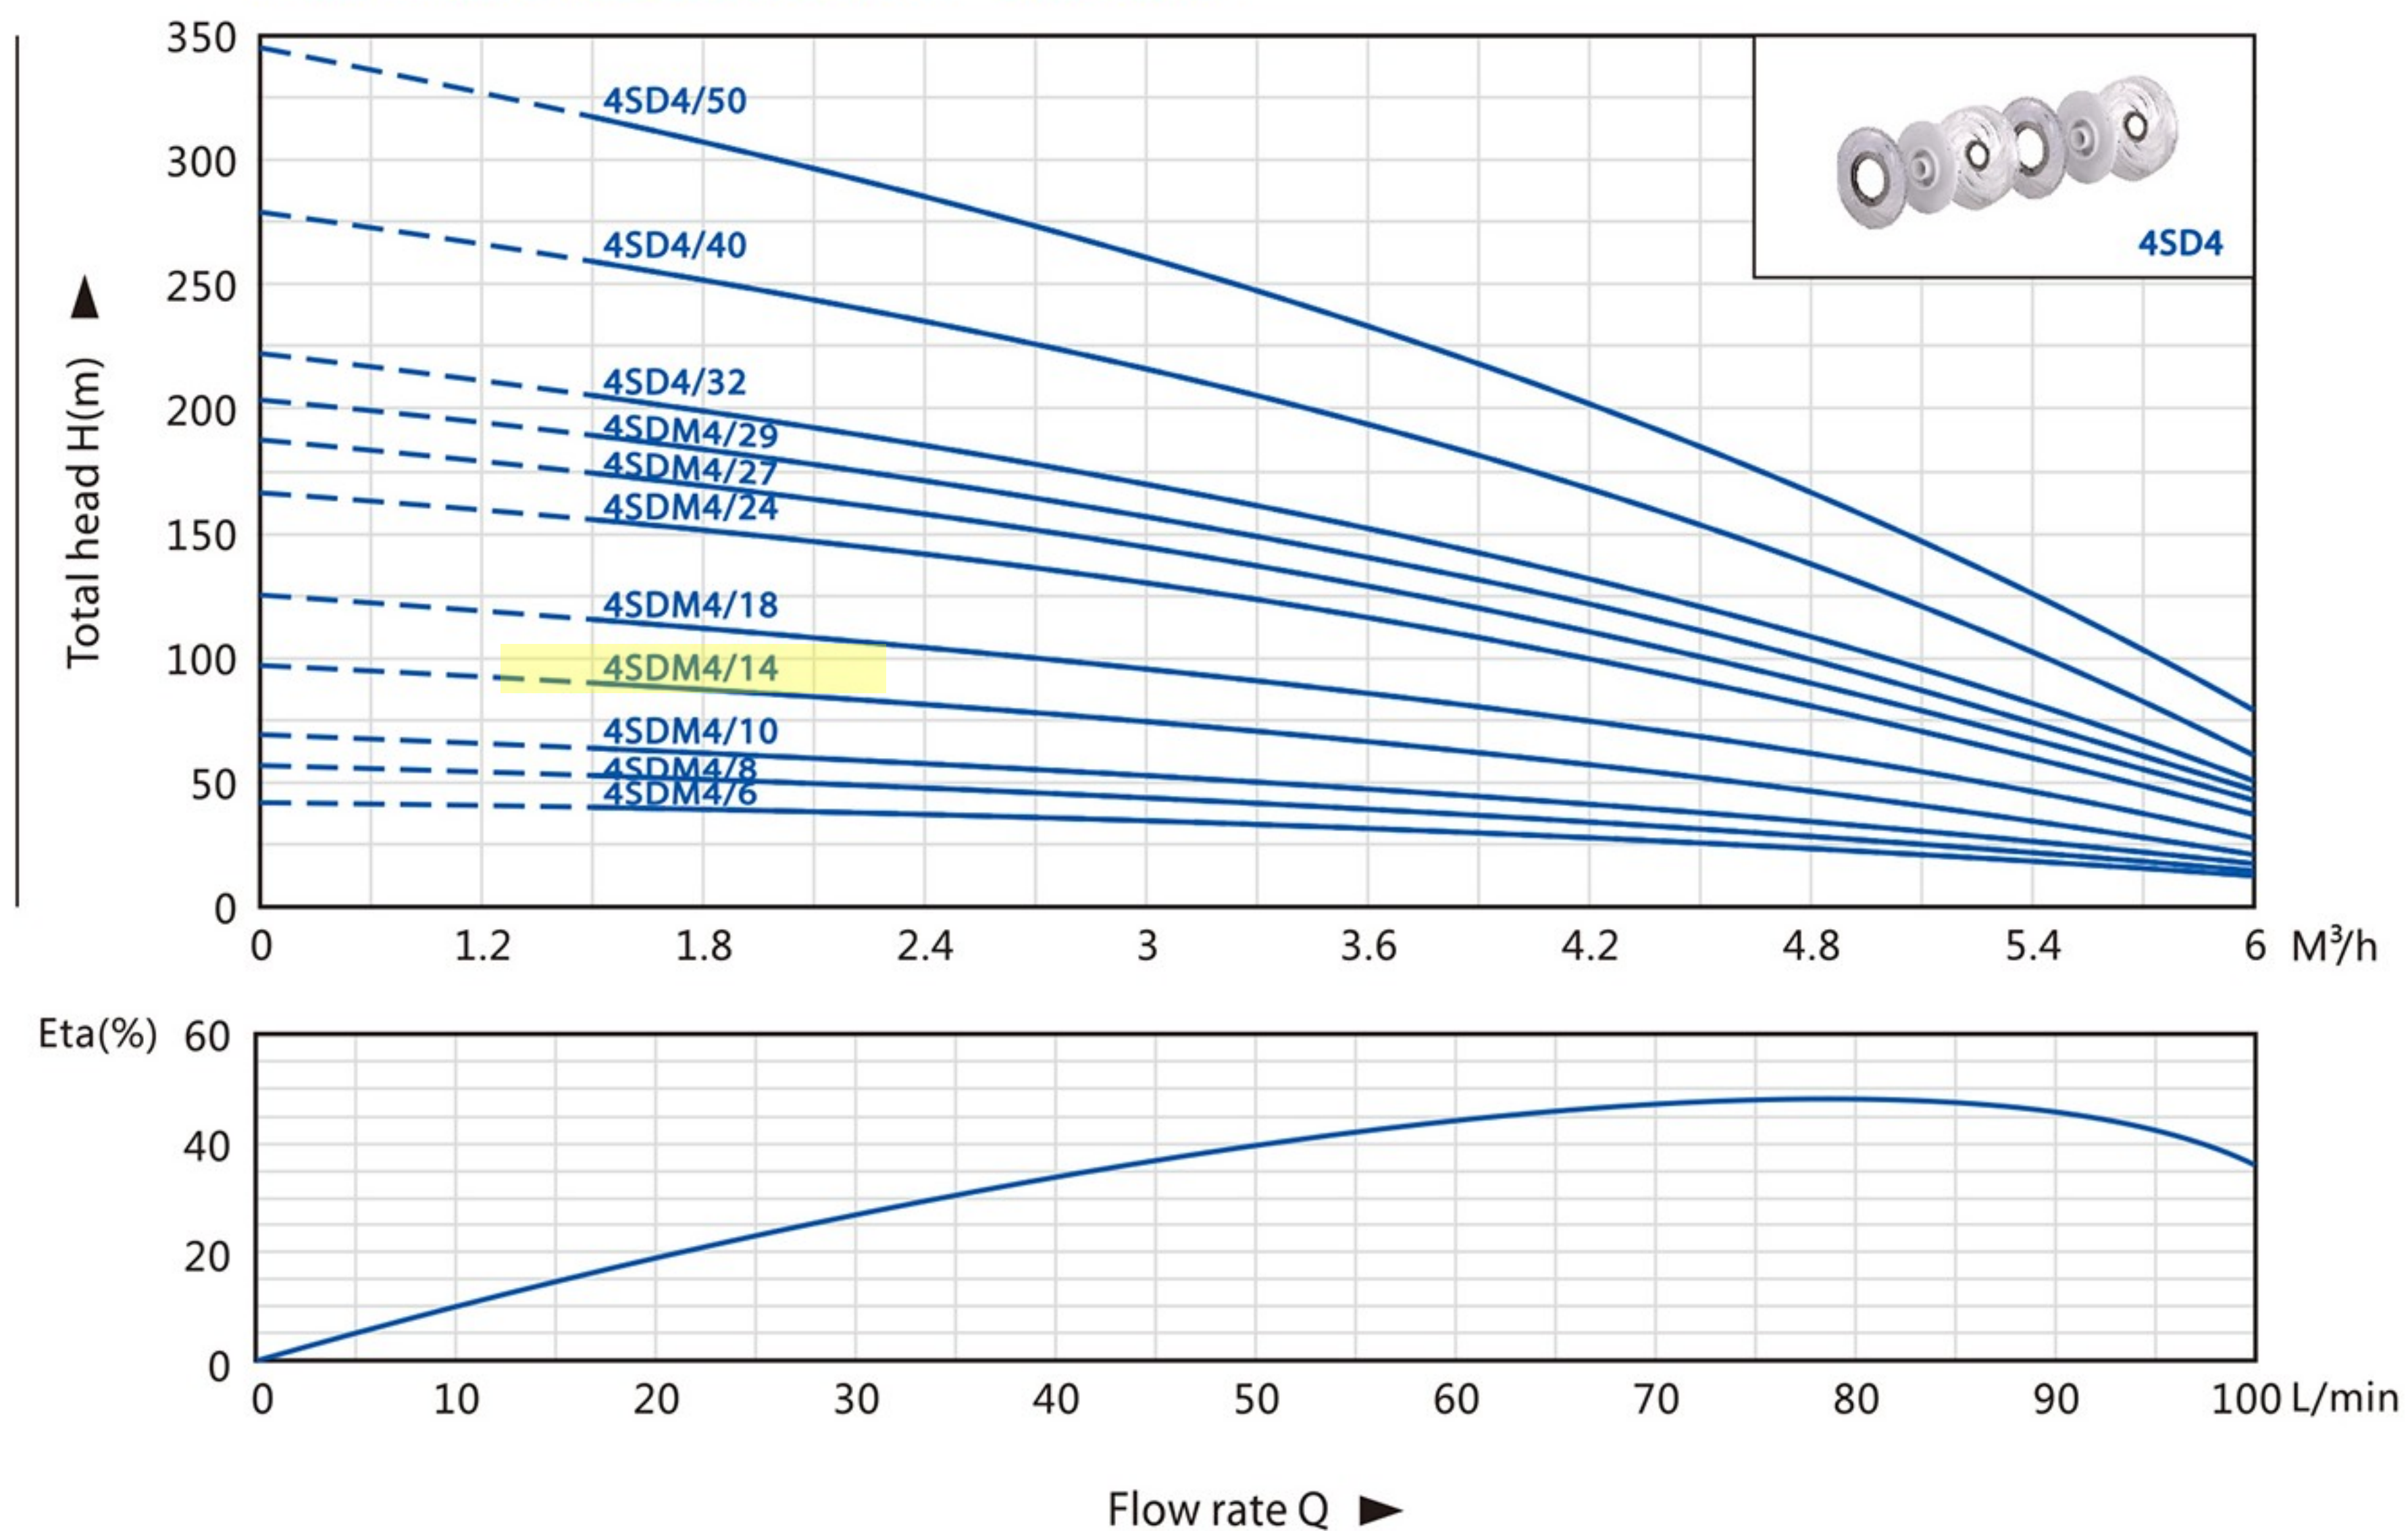

PERFORMANCE DATA 50Hz

Model		Power		Capacity & Head											
1~ 220V-240V	3~ 380V-415V	kW	HP	n=2850 r.p.m											
				Q(M³/h)	0	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4	6	
				Q(L/min)	0	20	30	40	50	60	70	80	90	100	
4SDM4/6		0.37	0.5	H(m)	42	37	35	34	32	29	24	21	18	10	
4SDM4/8		0.55	0.75		56	50	48	45	43	39	32	28	24	12	
4SDM4/10	4SD4/10	0.75	1		70	62	59	57	54	48	40	35	30	15	
4SDM4/14	4SD4/14	1.1	1.5		97	87	84	80	76	67	56	49	42	22	
4SDM4/18	4SD4/18	1.5	2		125	112	107	103	97	86	73	63	54	28	
4SDM4/24	4SD4/24	2.2	3		167	150	144	137	129	115	97	84	72	38	
4SDM4/27	4SD4/27	2.2	3		187	167	161	154	146	130	109	95	81	43	
4SDM4/29	4SD4/29	2.6	3.5		202	179	172	165	157	140	117	102	87	46	
	4SD4/32	3	4		222	198	191	183	172	154	129	112	96	51	
	4SD4/40	4	5.5		278	249	239	229	215	192	161	140	120	63	
	4SD4/50	5.5	7.5		347	311	299	285	269	240	202	176	150	79	

DIMENSIONS & WEIGHTS

Model		DN	DIMENSION (mm)			WEIGHT (kg)		
1~ 220V-240V	3~ 380V-415V		P	M	T	P	M	T
4SDM4/6		1¼"/1½"/2"	381	363	695	3.3	7.2	10.5
4SDM4/8		1¼"/1½"/2"	440	378	768	3.8	8	11.8
4SDM4/10	4SD4/10	1¼"/1½"/2"	500	398	846	4.4	8.7	13.1
4SDM4/14	4SD4/14	1¼"/1½"/2"	647	438	1035	5.4	10.8	16.2
4SDM4/18	4SD4/18	1¼"/1½"/2"	763	515	1230	6.4	13.8	20.2
4SDM4/24	4SD4/24	1¼"/1½"/2"	938	565	1452	8.2	16	24.2
4SDM4/27	4SD4/27	1¼"/1½"/2"	1026	590	1565	8.9	17.4	26.3
4SDM4/29	4SD4/29	1¼"/1½"/2"	1084	625	1659	9.5	20.3	29.8
	4SD4/32	1¼"/1½"/2"	1203	605	1756	10.4	19.3	29.7
	4SD4/40	1¼"/1½"/2"	1468	723	2140	12.6	21.9	34.5
	4SD4/50	1¼"/1½"/2"	1790	903	2643	16.3	25.6	41.9

