


PERFORMANCE CHART AT N=2850RPM

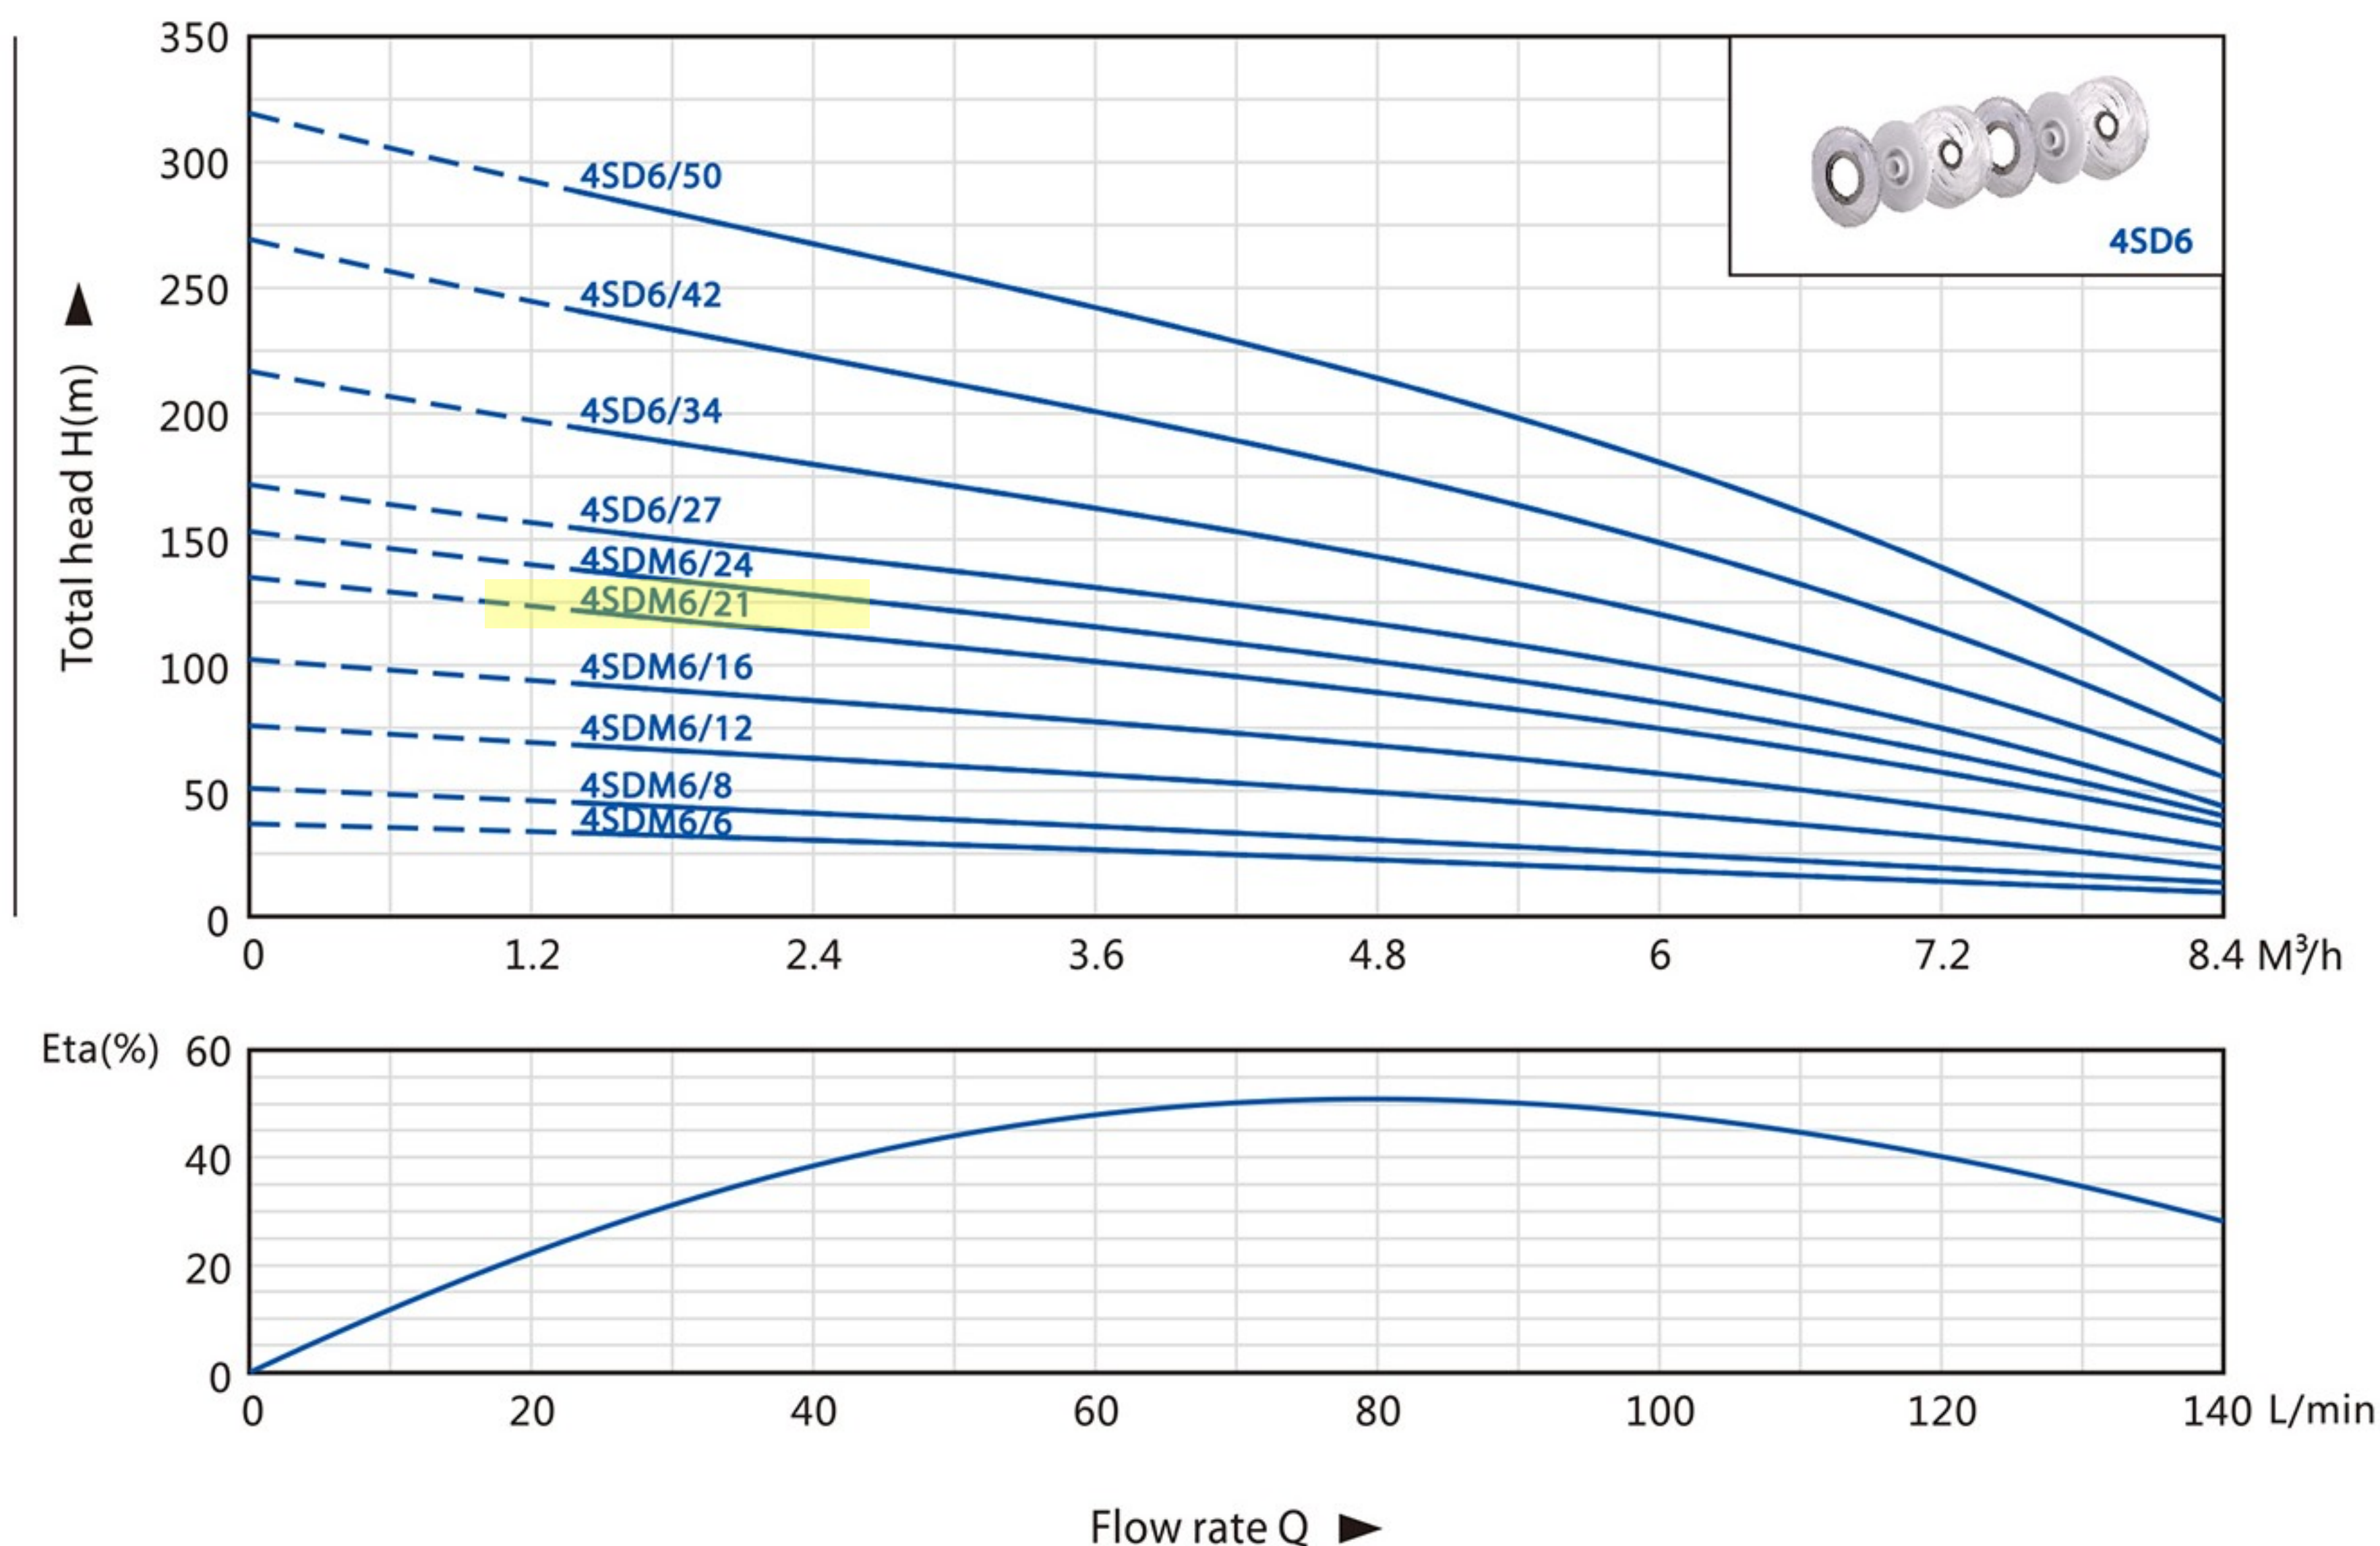

PERFORMANCE DATA 50Hz

Model		Power		Capacity & Head n=2850 r.p.m								
1~ 220V-240V	3~ 380V-415V	kW	HP	Q(M³/h)	0	1.2	2.4	3.6	4.8	6	7.2	8.4
				Q(L/min)	0	20	40	60	80	100	120	140
4SDM6/6		0.55	0.75	H(m)	38	36	31	28	27	23	17	10
4SDM6/8	4SD6/8	0.75	1		51	48	41	38	36	31	22	13
4SDM6/12	4SD6/12	1.1	1.5		76	72	61	57	54	46	33	20
4SDM6/16	4SD6/16	1.5	2		102	96	81	76	72	61	45	27
4SDM6/21	4SD6/21	2.2	2.5		134	126	107	100	94	80	59	35
4SDM6/24	4SD6/24	2.6	3.5		153	144	122	115	108	91	67	40
	4SD6/27	3.0	4		172	162	137	129	121	102	76	46
	4SD6/34	4.0	5.5		216	204	173	163	153	129	95	57
	4SD6/42	5.5	7.5		267	252	214	200	189	159	118	71
	4SD6/50	7.5	10		319	300	255	240	225	190	140	85

DIMENSIONS & WEIGHTS

Model		DN	DIMENSION (mm)			WEIGHT (kg)		
1~ 220V-240V	3~ 380V-415V		P	M	T	P	M	T
4SDM6/6		1¼" / 1½" / 2"	390	378	778	3.4	8	11.4
4SDM6/8	4SD6/8	1¼" / 1½" / 2"	452	398	917	3.9	8.7	12.6
4SDM6/12	4SD6/12	1¼" / 1½" / 2"	607	438	1147	5	10.8	15.8
4SDM6/16	4SD6/16	1¼" / 1½" / 2"	730	515	1305	6.4	13.8	20.2
4SDM6/21	4SD6/21	1¼" / 1½" / 2"	884	590	1439	7.8	17.4	25.2
4SDM6/24	4SD6/24	1¼" / 1½" / 2"	1008	625	1681	8.4	20.3	28.7
	4SD6/27	1¼" / 1½" / 2"	1100	605	1863	9.2	19.3	28.6
	4SD6/34	1¼" / 1½" / 2"	1347	723	2200	11.5	21.9	33.4
	4SD6/42	1¼" / 1½" / 2"	1594	813	1544	14.2	25.6	39.8
	4SD6/50	1¼" / 1½" / 2"	1871	903	1821	16.7	28.3	45

