

KEP 403, 50Hz


ISO 9906 Annexure A

PERFORMANCE CHART

Model Name			Rating			Discharge									
Single Phase	Three Phase	Stage	kW	HP	l/min	0	7	20	34	40	47	54	60	67	
					m³/h	0	0.42	1.20	2.04	2.40	2.82	3.24	3.60	4.02	

KEP 403-06	KEP 403-06	06	0.37	0.50	HEAD IN Mtrs.	38	37	35	32	31	28	26	22	18
KEP 403-09	KEP 403-09	09	0.55	0.75		57	55	52	48	46	43	39	33	17
KEP 403-12	KEP 403-12	12	0.75	1.00		76	73	69	64	62	57	52	45	36
KEP 403-15	KEP 403-15	15	1.10	1.50		95	92	87	81	77	71	64	56	45
KEP 403-18	KEP 403-18	18	1.10	1.50		114	110	104	97	93	86	77	67	54
KEP 403-22	KEP 403-22	22	1.50	2.00		139	134	127	118	113	104	95	82	66
KEP 403-25	KEP 403-25	25	1.50	2.00		158	152	144	134	128	119	108	93	75
KEP 403-29	KEP 403-29	29	2.20	3.00		183	177	168	156	149	138	125	108	87
KEP 403-33	KEP 403-33	33	2.20	3.00		209	201	191	177	170	157	142	122	99
	KEP 403-39	39	3.00	4.00		246	238	225	209	200	185	168	145	117
	KEP 403-45	45	3.00	4.00		284	274	260	242	231	214	194	167	135
	KEP 403-52	52	4.00	5.50		329	317	301	279	267	247	224	193	156
	KEP 403-60	60	4.00	5.50		379	366	347	322	308	285	258	223	180

Dimensions & Weights

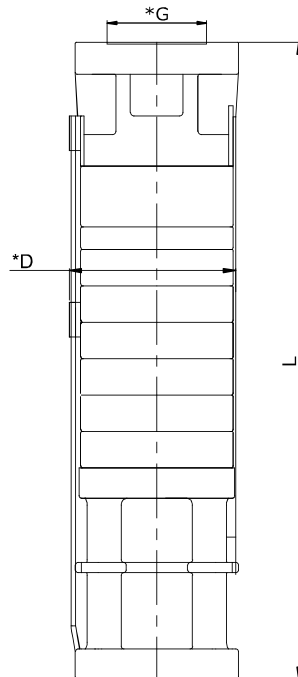

Model Name	Specification			
	D (mm)	L (mm)	Pump Weight Kg.	Weight (incl. pkg.) Kg.
KEP 403-06	98	282	3.4	3.7
KEP 403-09	98	345	4.4	4.9
KEP 403-12	98	408	5.4	6.0
KEP 403-15	98	471	6.4	7.2
KEP 403-18	98	534	7.4	8.3
KEP 403-22	98	639	8.7	9.8
KEP 403-25	98	702	9.7	11.0
KEP 403-29	98	786	10.9	12.4
KEP 403-33	98	870	12.2	13.9
KEP 403-39	98	1073	12.7	14.5
KEP 403-45	98	1220	14.0	16.0
KEP 403-52	98	1367	15.5	17.8
KEP 403-60	98	1535	17.3	20.0

PERFORMANCE CURVES

