

KEP 403, 50Hz


ISO 9906 Annexure A

PERFORMANCE CHART

Model Name			Rating			Discharge									
Single Phase	Three Phase	Stage	kW	HP	l/min	0	7	20	34	40	47	54	60	67	
					m³/h	0	0.42	1.20	2.04	2.40	2.82	3.24	3.60	4.02	

Model Name		Stage	Rating			HEAD IN Mtrs.	38	37	35	32	31	28	26	22	18
Single Phase	Three Phase		kW	HP			57	55	52	48	46	43	39	33	17
KEP 403-06	KEP 403-06	06	0.37	0.50			76	73	69	64	62	57	52	45	36
KEP 403-09	KEP 403-09	09	0.55	0.75			95	92	87	81	77	71	64	56	45
KEP 403-12	KEP 403-12	12	0.75	1.00			114	110	104	97	93	86	77	67	54
KEP 403-15	KEP 403-15	15	1.10	1.50			139	134	127	118	113	104	95	82	66
KEP 403-18	KEP 403-18	18	1.10	1.50			158	152	144	134	128	119	108	93	75
KEP 403-22	KEP 403-22	22	1.50	2.00			183	177	168	156	149	138	125	108	87
KEP 403-25	KEP 403-25	25	1.50	2.00			209	201	191	177	170	157	142	122	99
KEP 403-29	KEP 403-29	29	2.20	3.00			246	238	225	209	200	185	168	145	117
KEP 403-33	KEP 403-33	33	2.20	3.00			284	274	260	242	231	214	194	167	135
	KEP 403-39	39	3.00	4.00			329	317	301	279	267	247	224	193	156
	KEP 403-45	45	3.00	4.00											
	KEP 403-52	52	4.00	5.50											
	KEP 403-60	60	4.00	5.50			379	366	347	322	308	285	258	223	180

Dimensions & Weights

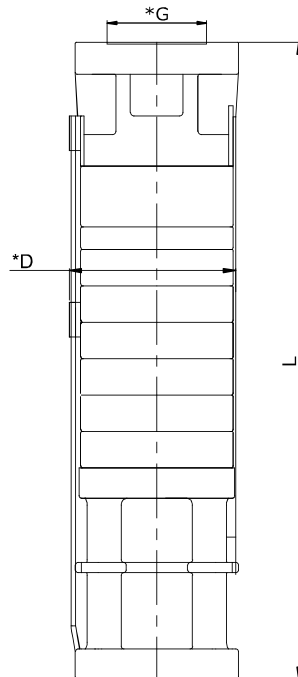

Model Name	Specification			
	D (mm)	L (mm)	Pump Weight Kg.	Weight (incl. pkg.) Kg.
KEP 403-06	98	282	3.4	3.7
KEP 403-09	98	345	4.4	4.9
KEP 403-12	98	408	5.4	6.0
KEP 403-15	98	471	6.4	7.2
KEP 403-18	98	534	7.4	8.3
KEP 403-22	98	639	8.7	9.8
KEP 403-25	98	702	9.7	11.0
KEP 403-29	98	786	10.9	12.4
KEP 403-33	98	870	12.2	13.9
KEP 403-39	98	1073	12.7	14.5
KEP 403-45	98	1220	14.0	16.0
KEP 403-52	98	1367	15.5	17.8
KEP 403-60	98	1535	17.3	20.0

KEP 403, 50Hz
ISO 9906 Annexure A

PERFORMANCE CURVES

