


Technical data

Mixed flow **6"** stainless steel submersible bore well pumps

W60

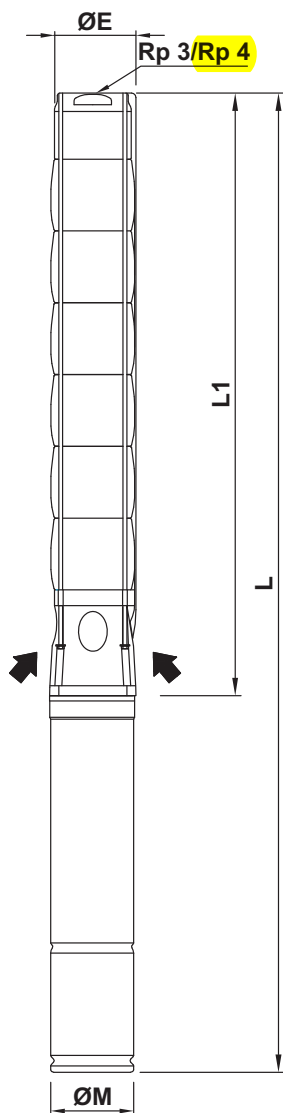

Performance chart

Pump type	Motor type	kW	HP	Q m³/h l/min	n = 2900 rpm						
					0	20	30	40	50	70	78
	Water filled				0	333	500	667	833	1167	1300
W60/11	L6530-KP	22.0	30.0	H mts.	158	147	133	117	102	67	45
W60/12	L6530-KP	22.0	30.0		172	159	143	126	110	72	50
W60/13	L6535-KP	26.0	35.0		187	174	157	138	120	78	55
W60/14	L6535-KP	26.0	35.0		200	186	168	148	129	85	58
W60/15	L6535-KP	26.0	35.0		214	197	178	157	137	89	60
W60/16	L6540-KP	30.0	40.0		230	213	192	168	147	95	65
W60/17	L6540-KP	30.0	40.0		243	225	203	178	156	100	68
W60/18	L6550-KP	37.0	50.0		260	242	220	193	168	111	78
W60/19	L6550-KP	37.0	50.0		273	255	230	203	177	117	82
W60/20	L6550-KP	37.0	50.0		287	267	242	213	184	122	85
W60/21	L6550-KP	37.0	50.0		301	280	253	223	192	128	89
W60/22	L8560-KH	45.0	60.0		323	302	274	242	211	141	100

Dimensions & weights of pump with Water filled motor

Type Pump + Motor	ØM [mm]	ØE [mm]	Length [mm]			Gross weight [kg]			Gross volume [m³]		
			L1	L		Pump	Pump+Motor		Pump	Pump+Motor	
				1 ~	3 ~		1 ~	3 ~		1 ~	3 ~
W60/11 + L6530-KP	142	148	1524	-	2577	37.5	-	141.5	0.0412	-	0.1652
W60/12 + L6530-KP	142	148	1637	-	2690	41.0	-	145.0	0.0515	-	0.1755
W60/13 + L6535-KP	142	148	1766	-	2899	44.0	-	157.5	0.0515	-	0.1845
W60/14 + L6535-KP	142	148	1879	-	3012	46.5	-	160.0	0.0515	-	0.1845
W60/15 + L6535-KP	142	148	1992	-	3125	50.0	-	163.5	0.0448	-	0.1778
W60/16 + L6540-KP	142	148	2105	-	3288	52.5	-	170.9	0.0472	-	0.1802
W60/17 + L6540-KP	142	148	2218	-	3401	56.0	-	174.4	0.0497	-	0.1827
W60/18 + L6550-KP	142	148	2331	-	3644	62.0	-	197.0	0.0521	-	0.1921
W60/19 + L6550-KP	142	148	2444	-	3757	64.5	-	199.5	0.0546	-	0.1946
W60/20 + L6550-KP	142	148	2557	-	3870	68.0	-	203.0	0.0570	-	0.1970
W60/21 + L6550-KP	142	148	2670	-	3983	70.5	-	205.5	0.0595	-	0.1995
W60/22 + L8560-KH	190	190	2812	-	4024	74.0	-	288.0	0.1994	-	0.4124

Note: ØE = For single cable motor maximum diameter of pump inclusive of cable guard.
For two cable motor maximum diameter of pump inclusive of cable guard will increase by 3 mm.

All dimensions in mm unless otherwise noted.

Performance curves

Mixed flow **6"** stainless steel submersible bore well pumps

W60

