


Technical data

Mixed flow **6"** stainless steel submersible bore well pumps

W17

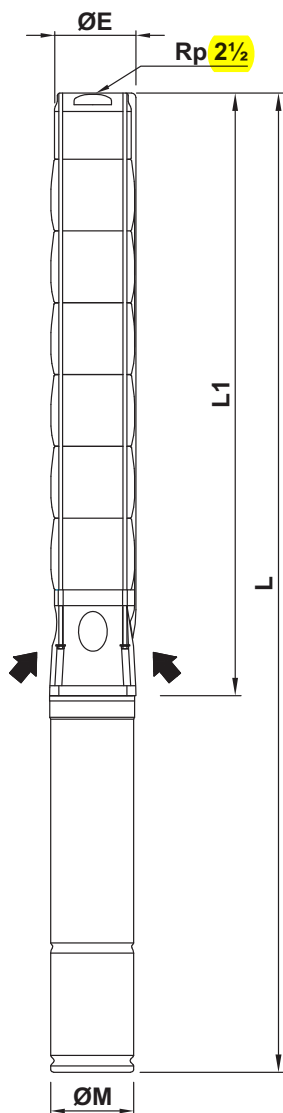

W17/43 to W17/60 are mounted in sleeve for Rp 3 connection.

Performance chart

Pump type	Motor type	kW	HP	Q m³/h l/min	n = 2900 rpm						
					0	4	8	12	16	20	22.1
	Water filled				0	67	133	200	267	333	369
W17/22	L6517-KP	13.0	17.5	H mts.	245	244	238	218	185	142	113
W17/23	L6517-KP	13.0	17.5		257	256	248	227	193	147	117
W17/24	L6517-KP	13.0	17.5		267	266	258	236	200	152	120
W17/25	L6520-KP	15.0	20.0		280	280	270	249	212	162	130
W17/26	L6520-KP	15.0	20.0		291	289	280	258	220	167	134
W17/27	L6520-KP	15.0	20.0		301	299	290	267	227	172	137
W17/28	L6525-KP	18.5	25.0		315	314	305	280	240	185	150
W17/29	L6525-KP	18.5	25.0		326	324	315	290	249	191	154
W17/30	L6525-KP	18.5	25.0		337	335	325	300	256	196	158
W17/31	L6525-KP	18.5	25.0		347	346	335	309	263	202	162
W17/32	L6525-KP	18.5	25.0		358	357	346	318	271	207	166
W17/33	L6525-KP	18.5	25.0		369	368	356	327	280	212	169
W17/34	L6530-KP	22.0	30.0		382	380	370	340	291	223	179
W17/35	L6530-KP	22.0	30.0		393	391	380	350	299	228	183
W17/36	L6530-KP	22.0	30.0		404	402	390	359	306	234	187
W17/37	L6530-KP	22.0	30.0		413	412	400	368	313	240	190
W17/38	L6530-KP	22.0	30.0		424	422	410	376	321	245	194
W17/39	L6530-KP	22.0	30.0		435	434	420	385	329	250	198
W17/40	L6530-KP	22.0	30.0		446	444	430	394	335	255	202
W17/43	L6535-KP	26.0	35.0		482	480	465	429	366	280	223
W17/45	L6535-KP	26.0	35.0		503	501	485	446	381	290	230
W17/48	L6535-KP	26.0	35.0		535	533	515	473	403	305	243
W17/51	L6540-KP	30.0	40.0		567	565	549	503	430	330	262
W17/53	L6540-KP	30.0	40.0		588	586	569	521	445	340	270
W17/55	L6550-KP	37.0	50.0		617	616	599	553	475	367	295
W17/58	L6550-KP	37.0	50.0		650	648	630	580	498	384	309
W17/60	L6550-KP	37.0	50.0		671	670	651	600	513	395	317

Dimensions & weights of pump with Water filled motor

Type Pump + Motor	ØM [mm]	ØE [mm]	Length [mm]			Gross weight [kg]			Gross volume [m³]		
			L1	L		Pump	Pump+Motor		Pump	Pump+Motor	
				1 ~	3 ~		1 ~	3 ~		1 ~	3 ~
W17/22 + L6517-KP	142	142	1616	-	2479	52.5	-	123.7	0.0450	-	0.0760
W17/23 + L6517-KP	142	142	1676	-	2539	55.0	-	126.2	0.0450	-	0.0760
W17/24 + L6517-KP	142	142	1737	-	2600	57.0	-	128.2	0.0450	-	0.0760
W17/25 + L6520-KP	142	142	1798	-	2731	58.5	-	137.6	0.0450	-	0.0760
W17/26 + L6520-KP	142	142	1858	-	2791	61.0	-	140.1	0.0450	-	0.0760
W17/27 + L6520-KP	142	142	1919	-	2852	63.5	-	142.6	0.0450	-	0.0760
W17/28 + L6525-KP	142	142	1979	-	2972	65.0	-	150.2	0.0460	-	0.0770
W17/29 + L6525-KP	142	142	2040	-	3033	117.5	-	202.7	0.0480	-	0.0790
W17/30 + L6525-KP	142	142	2100	-	3093	120.5	-	205.7	0.0490	-	0.0800
W17/31 + L6525-KP	142	142	2160	-	3153	123.0	-	208.2	0.0490	-	0.0800
W17/32 + L6525-KP	142	142	2220	-	3213	125.5	-	210.7	0.0490	-	0.0800
W17/33 + L6525-KP	142	142	2280	-	3273	129.5	-	214.7	0.0530	-	0.0840
W17/34 + L6530-KP	142	142	2340	-	3393	133.0	-	237.0	0.0530	-	0.1770
W17/35 + L6530-KP	142	142	2400	-	3453	136.0	-	240.0	0.0530	-	0.1770
W17/36 + L6530-KP	142	142	2460	-	3513	139.0	-	243.0	0.0571	-	0.1811
W17/37 + L6530-KP	142	142	2520	-	3573	142.0	-	246.0	0.0571	-	0.1811
W17/38 + L6530-KP	142	142	2580	-	3633	146.0	-	250.0	0.0571	-	0.1811
W17/39 + L6530-KP	142	142	2640	-	3693	149.5	-	253.5	0.0612	-	0.1852
W17/40 + L6530-KP	142	142	2700	-	3753	153.0	-	257.0	0.0612	-	0.1852
W17/43 + L6535-KP	142	175	2880	-	4013	158.0	-	271.5	0.0612	-	0.1942
W17/45 + L6535-KP	142	175	3060	-	4193	163.0	-	276.5	0.0612	-	0.1942
W17/48 + L6535-KP	142	175	3240	-	4373	168.0	-	281.5	0.0612	-	0.1942
W17/51 + L6540-KP	142	175	3420	-	4603	173.0	-	291.4	0.0612	-	0.1942
W17/53 + L6540-KP	142	175	3540	-	4723	178.0	-	296.4	0.0612	-	0.1942
W17/55 + L6550-KP	142	175	3660	-	4973	183.0	-	318.0	0.0612	-	0.2012
W17/58 + L6550-KP	142	175	3840	-	5153	188.0	-	323.0	0.0612	-	0.2012
W17/60 + L6550-KP	142	175	3960	-	5273	193.0	-	328.0	0.0612	-	0.2012

Note: ØE = For single cable motor maximum diameter of pump inclusive of cable guard.
For two cable motor maximum diameter of pump inclusive of cable guard will increase by 3 mm.

All dimensions in mm unless otherwise noted.

Performance curves

Mixed flow **6"** stainless steel submersible bore well pumps

W17

